



MOUNTING ACCESSORIES FOR TEC RELAYS OF 1800 SERIES

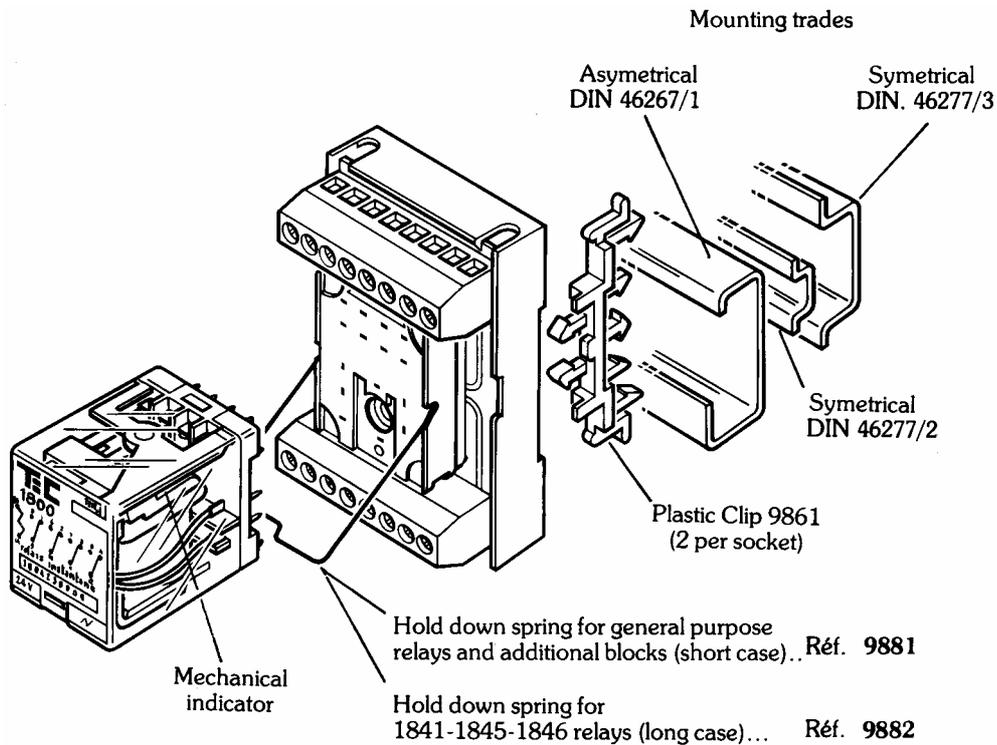


WITHDRAWAL GUIDE FOR TEC RELAYS OF 1800 SERIES

10 STANDARD WITHDRAWAL COMBINATIONS ARE AVAILABLE THROUGH THE ASSOCIATION OF BREAKABLE CODING LUGS MOUNTED ON THE RELAY BASE AND CORRESPONDING CODING PLATES PLUGGABLE ON THE SOCKET.




coding lugs part on the relay

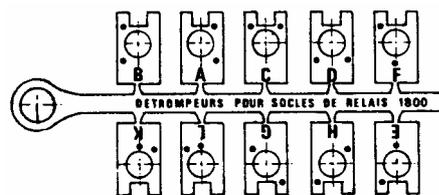

complete coding plastic plates with ref 9871 available in BLUE (instantaneous), GREEN (latching), BROWN (timer) or RED (low level)

Relays withdrawal coding : please indicate on the order :

- relay without coding lug (to be used on PCB)
- relay with complete coding lug
- relay coded in factory with code A ou B, or L



Socket withdrawal coding : please indicate on the order :

- socket without coding plate
- socket with coding plate (choose the colour BLUE, GREEN, BROWN or RED)
- socket coded in factory with code A, B, or L (choose the colour BLUE, GREEN, BROWN or RED)

WITHDRAWAL GUIDE FOR MTI RELAYS OF « CA » SERIES

| | | | | | |
|-----|---|---|-----------------------|----------------------|-----------------------|
| | Plastic part to be cut according to the selection | Withdrawal guide pins selection table for CAA relays | | | |
| | | VAC operation | | VDC operation | |
| | | nominal voltage | withdrawal guide pins | nominal voltage | withdrawal guide pins |
| | | 6 | AE | 6 | CE |
| | | 12 | AF | 12 | CF |
| | | 24 | AG | 24 | CG |
| | | 48 | AH | 48 | CH |
| 127 | BF | 125 | DF | | |
| 220 | BG | 220 | DG | | |
| 380 | BH | | | | |

| | | | |
|-----|---|---|-----------------------|
| | Plastic part to be cut according to the selection | Withdrawal guide pins selection table for CACTA relays | |
| | | V AC/DC operation | |
| | | Nominal voltage | withdrawal guide pins |
| | | 24 | CG |
| | | 48 | CH |
| | | 125 | DF |
| 220 | DG | | |

| | | | |
|-----|---|---|-----------------------|
| | Plastic part to be cut according to the selection | Withdrawal guide pins selection table for CAD/CAK/CAQ /CARA relays | |
| | | AC/DC operation | |
| | | Nominal voltage | Withdrawal guide pins |
| | | 12 | CF |
| | | 24 | CG |
| | | 48 | CH |
| 125 | DF | | |
| 220 | DG | | |

| | | | |
|-----|---|---|-----------------------|
| | Plastic part to be cut according to the selection | Withdrawal guide pins selection table for CAP relays | |
| | | AC/DC operation | |
| | | Nominal voltage | withdrawal guide pins |
| | | 12 | CF |
| | | 24 | CG |
| | | 48 | CH |
| | | 125 | DF |
| 220 | DG | | |
| 380 | BH | | |

| | | | | | |
|-----|---|---|-----------------------|---------------------|-----------------------|
| | Plastic part to be cut according to the selection | Withdrawal guide pins selection table for CAT relays | | | |
| | | AC operation | | DC operation | |
| | | Nominal voltage | withdrawal guide pins | Nominal voltage | withdrawal guide pins |
| | | 24 | AG | 24 | CG |
| | | 48 | AH | 48 | CH |
| | | 127 | BF | 125 | DF |
| 230 | BH | 220 | DG | | |
| 380 | BH | | | | |